

Features

- Low Noise Compact Design
- Intel® Core i7 Series Processor
- Dual-Purpose Recording & Live Viewing
- Dedicated SSD Boot Drive
- Up to 20TB Internal Video Storage
- Designed for 24/7 Video Recording
- Dual SATA drive configurations available
- Pre-Loaded Windows 10 Enterprise
- Ready for any VMS deployment



3 Year
Waranty



Full Turnkey
System



Made for
IP Video




Multi-Display
Support

CR67

Compact All-In-One NVR Appliance

The CR67 compact video server (NVR) has been designed for performance and peace of mind. Offering recording capacity up to 20TB, the CR67 offers key features such as pre-installed operating system, high performance INTEL processor, dedicated SSD boot drive (OS), dual SATA drives and Gigabit Ethernet.

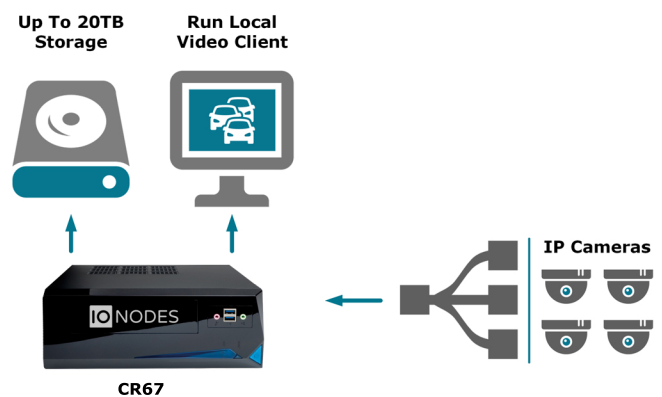

Built to last

High performance solid state boot drive, internal realtime hardware and software watchdogs and fully recoverable operating system image extends the reliability of your critical installations.

Recommended VMS platforms


AVIGILON
THE BEST EVIDENCE™

AXIS
COMMUNICATIONS

exacq
Technologies

Genetec

milestone

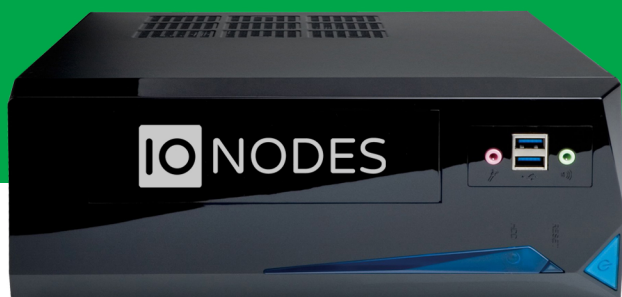

CR67 Specifications

Compact All-In-One NVR Appliance

System

Processor	Intel® Core i7-9700 (passmark: 15951) 12M Cache, up to 4.70 GHz
Memory	8GB DDR4
Network	2 x 10/100/1000 Base-T Ethernet port(s) RJ45
USB	4 x USB 3.0 2 x USB 2.0
Video Outputs	Intel® UHD Graphics 630 Multi output support : HDMI/DVI-D/VGA - HDMI 1.4b max. 4096x2160@24Hz / 25600x1600@60Hz - DVI-D with max. 1920x1200@60Hz - VGA with max. 1920x1200@60Hz
Audio	8-Channel High Definition Audio
Boot Drive	Min. 240GB Solid State Boot Drive (SSD)
Video Storage	2 x 3.5" SATA A/V HDD (up to 20TB)
Operating System	Windows 10 Enterprise
Recommended VMS	Avigilon, Axis, Exacq, Genetec, Milestone

Protocols

Networking	IPv4, UDP, TCP, IGMP, ARP, DHCP, DNS, HTTP, HTTPS, BONJOUR, NTP
Management	HTTP, HTTPS, Bonjour, ION API, SNMP
Security	Basic / Digest Authentication, SSL

Software Features

Web Interface	Web GUI for remote config. / maintenance
Programming API	Bonjour discovery protocol ION API for configuration
Firmware Update	Fault-tolerant, remote accessible

Mechanical / Environmental

Dimensions	12.20" (W) x 3.94" (H) x 10.43" (D)
Power Supply	Internal Standard TFX 12V, 200W (US Power Cord Included)
Security	Padlock Loop / Kensington Slot
Operating Temp.	0°C - 40°C
Warranty	3 Years Standard
Compliance	RoHS, CE and FCC Class B

Ordering Information

CR67-04-04TB	CR67 with 1 x 4TB of internal storage.
CR67-08-08TB	CR67 with 1 x 8TB of internal storage.
CR67-10-10TB	CR67 with 1 x 10TB of internal storage.
CR67-04-08TB	CR67 with 2 x 4TB of internal storage.
CR67-08-16TB	CR67 with 2 x 8TB of internal storage.
CR67-10-20TB	CR67 with 2 x 10TB of internal storage.
CR67-PWR-EUUK	CR67 power cord kit for EU and UK regions.
CR67-RM	2U vented universal depth shelf for server racks.



www.ionodes.com

Head Office
666 boul. Saint-Martin O,
Laval, Quebec
H7M 5G4, Canada

sales@ionodes.com

1.450.696.1060
1.844.696.1060 (Toll Free)

EMEA Office
15, Rue de l'Industrie,
Bertrange, L-8069
Luxembourg

sales_eu@ionodes.com

+35 (2) 661 23 03 33